

# DONGGUAN SUNWORLD CO.,LTD


**SUNWORLD** Founded in **2011**,

It is a **Hong Kong** funded enterprise focusing on high quality Solar panels. It owned production factory, located in Dongguan City, **JinBoLi** Industry Park, Specializes in the production, R & D and sales of solar panels, flexible solar panels, controllers, folding bags and power generation systems.

The products are widely used in photovoltaic power generation system, off grid power generation, outdoor power supply, RV, street lamp, monitoring and security, water conservancy monitoring, Internet of things power generation and other fields,

**With 12 years** of foreign trade export experience, the products are exported to the United States, the European Union, Japan, more than 50 countries , and the factory has obtained **ISO9001, IEC, CE, ROHS, SGS, CNAS, Certification.**

**SUNWORLD** has been committed to becoming a world-class supplier of solar green energy solutions, serving the whole mankind

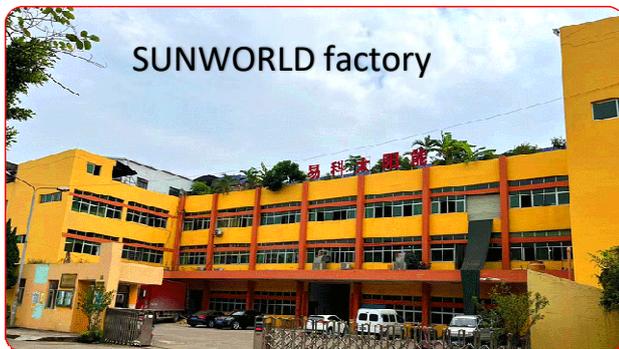

## 200W Flexible Solar Panel Spe


### 1、Electrical parameters

Solar Panel Type	SWF200W
Maximum Power	200W
Voltage at Pmax	18.68V
Current at Pmax	10.71A
Open-Circuit Voltage	22.30V
Short-Circuit Current	11.27A
Solar Cell Efficiency	20%-22%
Power Tolerance	±5%
Working Temperature	-40°C - +55°C
Power Temperature Coefficient	-0.43%/°C
(STC): irradiation1000w/ m <sup>2</sup> , temperature 25 °C, air quality AM1.5, output power error: ± 5%	

## 2、Mechanical Parameters

Surface Material	ETFE(Import from JP)
Cell Main Line	9BB/12BB
Cell Width	158.75/161.75/166/182
Cell Array	36pcs 4*9
Panel Size	1500*680*3mm
Weight	4.5KG
Junction Box	IP65
Cable	PV2.5 80CM+MC4
Junction box Contact Material	Copper
Plastic Holder	
Diode Protect	1*20A Diode
Installation Requirements	The bent Less than 35 degrees, and it is gently handled. The bottom layer needs to be installed for heat insulation or heat dissipation.
Laminated Structure	ETFE+EVA+Cell+EVA+Double Backsheet
Package	Plastic+Foam+Carton, 2pc/carton

## 3、IV and PV Curve Chart

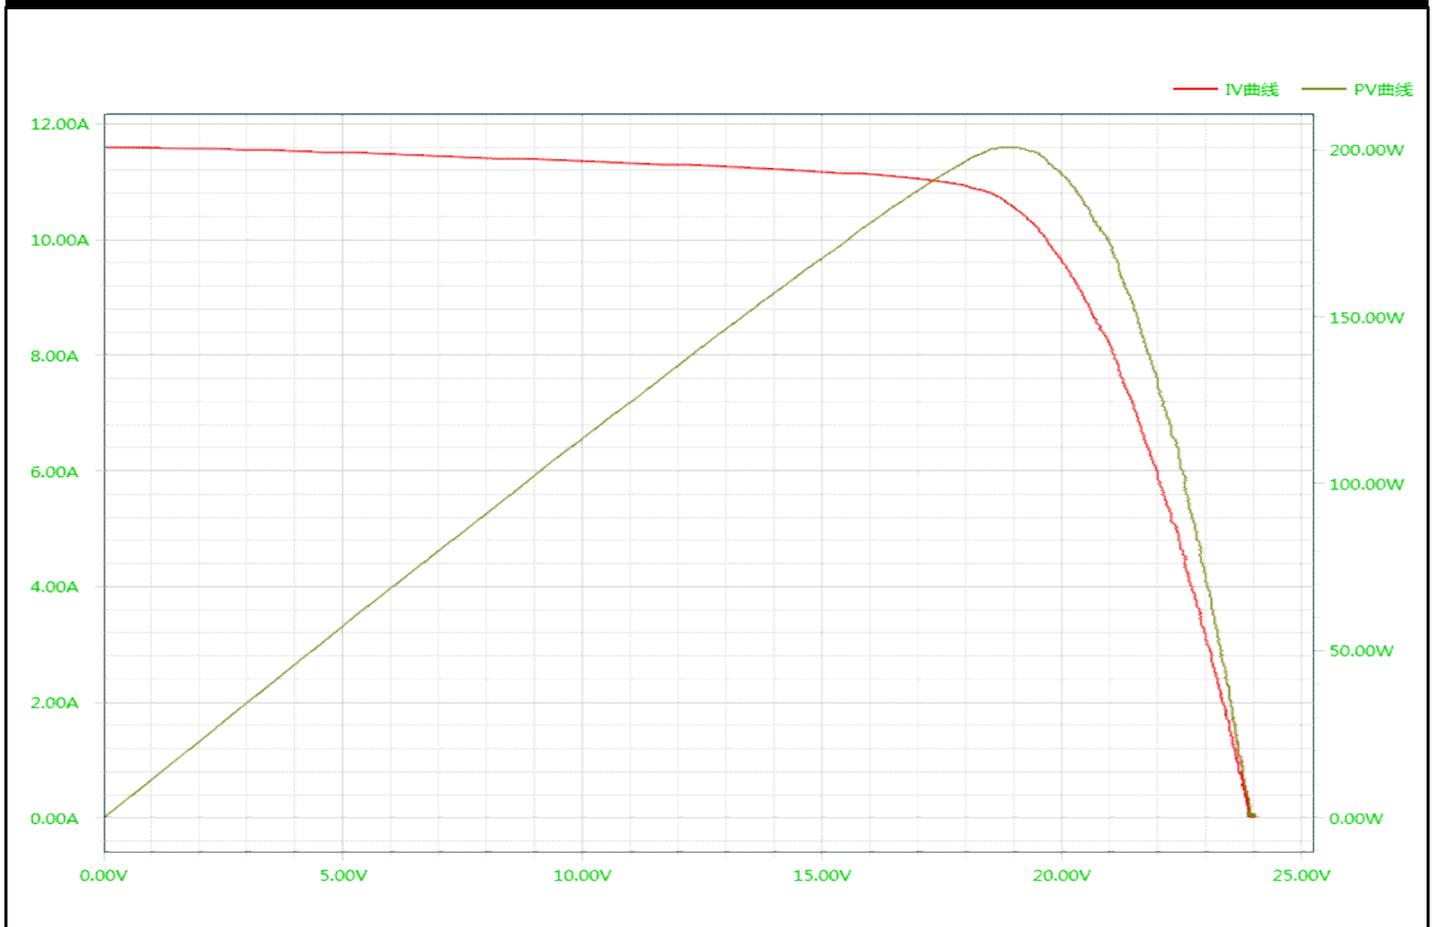

## 4、 Front and Back Photo



**Material :**ETFE  
 Import from JP  
**properties:**  
 Bump surface  
 Waterproof&  
 Stainless&  
 Increase Light  
 Absorption&  
 Weather Resistant



**Junction box:**  
 IP65 WaterProof  
 TUV Standard  
 Contains




**MC4 Contact:** IP65  
 TUV



**Fix Hole:**  
 Rustless Copper

## 5、 Product Drawing and Holes

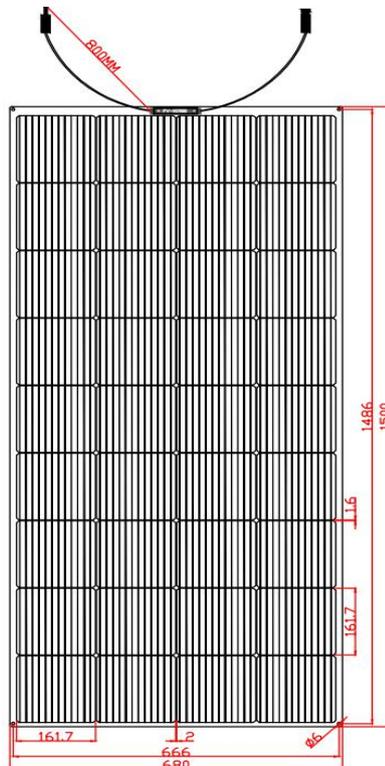

Hole:  
 4\* $\Phi$ 6mm  
 Distance  
 Width: 666mm